

VOX400 - Quick Start Guide



The VOX400 is a voice annunciator and MP3 player with built in amplifier and speaker. It can be triggered by using hard-wired alarm inputs, via RS485 or RJ45 Ethernet from other electronic equipment such as a computer or a DVR / NVR.

The MK4 also has a new LAN Trigger feature which means MP3 files can be triggered on a local network, via a additional software, see the full manual for more information.

Full Manual



www.systemq.com/PDF/manual/xVOX400.pdf

Powering the VoiceOFF

Power the VOX400 from 12V DC (via the input voltage terminals) on the PCB. The current consumption is 200mA maximum. A power supply is not provided.




Line input Connection

The line input audio is connected to the yellow audio input phono (RCA) connector on the PCB. The line input can be taken from an audio device or DVR via a audio phono (RCA) lead.



Volume Control

Use a small precision screwdriver to carefully adjust the pots. It is a multi-turn pot (20 turns from minimum to maximum) this means that in order to make a noticeable change the screw will need to be turned multiple revolutions. When you receive the VoiceOFF unit, the volume levels will have already been adjusted to a mid way point to suit most applications.

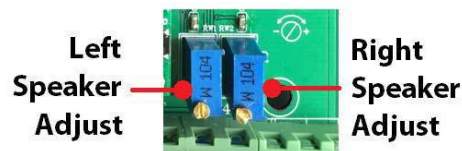

Increase - Turn clockwise
Decrease - Turn anti-clockwise


Triggering the Pre-recorded messages

The VoiceOFF will play a message depending on which alarm input is triggered and by how the MP3 files are named.

For example, when alarm input 1 is triggered, the VoiceOFF looks for an MP3 file that been named 0001.mp3.

See overleaf for the Pre-recorded message table.

If the alarm input trigger is continuously activated the audio message will repeat. Once the trigger is released it will continue playing the message in its entirety.

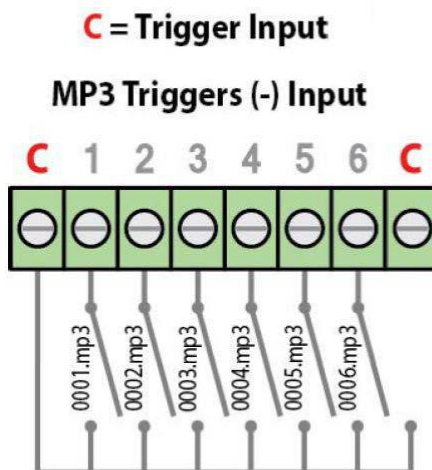

Pre-recorded Messages

File Name	Description / Text
0001.mp3	Warning message - "You have been detected in an unauthorised area, please leave the area or the police will be called, CCTV is recording."
0002.mp3	Warning message - "This is a restricted area and trespassing is forbidden, you have been caught on CCTV and your images will be saved as evidence against you."
0003.mp3	Warning message - "Warning! Intruder Detected! CCTV System Recording."
0004.mp3	Welcome message - "Welcome, this area has time limits on parking. Please observe the restrictions printed on the warning signs to prevent penalties being imposed."
0005.mp3	Welcome message - "Welcome, please help yourself to the self service coffee and someone will attend to you shortly."
0006.mp3	Police siren in the distance

Recording Custom Messages - Overview

The VOX400 will only play back audio files that are MP3.

Format the SD Card to FAT32.

The files must be in a folder on the SD Card called "SYSQ".

See the table above for file naming convention.

Remove the power before inserting / removing the SD card.

The maximum card size is 32Gb.

Specification

Operating Voltage	12V DC
Recommended Power Supply	POW803 12V DC 1.5A
Current Consumption	55mA standby 200mA max volume (depending on volume)
Alarm Inputs	6 internally triggered
RS2485	Terminals
Case	Ivory ABS
IP Rating	IP65
Mounting	Wall & Ceiling
Speaker	8W 8ohms
Usage	Internal or External
Dimensions	227mm x 187mm x 69mm
Memory	MicroSD Card 32Mb, 64Mb, 128Mb, 265Mb, 512Mb, 1Gb, 4Gb, 8Gb, 16Gb, 32Gb
Audio Format	MP3
Voltage Noise	<50mV
Signal to Noise Ratio	<86dB
Audio Decoder	DAC 24bit/s stereo, 196KHz
Network (RJ45)	RJ45 Socket

All specifications are approximate. System Q Ltd reserves the right to change product specifications or features without notice. Whilst every effort is made to ensure that these instructions are complete and accurate, System Q Ltd cannot be held responsible for any losses, no matter how they arise, from errors or omissions in these instructions, or the performance or non-performance of the equipment referred to.

